

BALL-MOUNTED SELF-CENTERING PLUGGABLE FEET



- UP TO 10 000 KG APPLICATION RANGE
- H 102 MM: FOR BENDING BEAM AND SHEAR BEAM LOAD CELLS
- H 89 MM: FOR FEET LOAD CELLS



MAX STATIC LOAD

kg	Thread	Dimensions	Material	Net weight (kg)
2 000	M12x1.75	Ø80 x H 102 mm	stainless steel	0.6
5 000	M20x2.5	Ø150 x H 102 mm	stainless steel	1.9
2 000	M12x1.75	Ø80 x H 89 mm	stainless steel	0.6
5 000	M20x2.5	Ø150 x H 89 mm	stainless steel	1.9
10 000	M24x3	Ø150 x H 89 mm	stainless steel	1.9



Technical drawing of a 2000 kg load cell, showing two views with dimensions.


Top View (Left):

- Overall height: 89
- Height of the upper section: 47
- Top diameter: $\phi 8,5$
- Thread: M12x1.75
- Angle: 30°
- Base diameter: $\phi 80$
- Base width: 55
- Base thread: M32x2
- Base height: 12

Bottom View (Right):

- Overall height: 102
- Height of the upper section: 60
- Top diameter: $\phi 8,5$
- Thread: M12x1.75
- Angle: 30°
- Base diameter: $\phi 80$
- Base width: 55
- Base thread: M32x2
- Base height: 12

DIMENSIONS (mm)

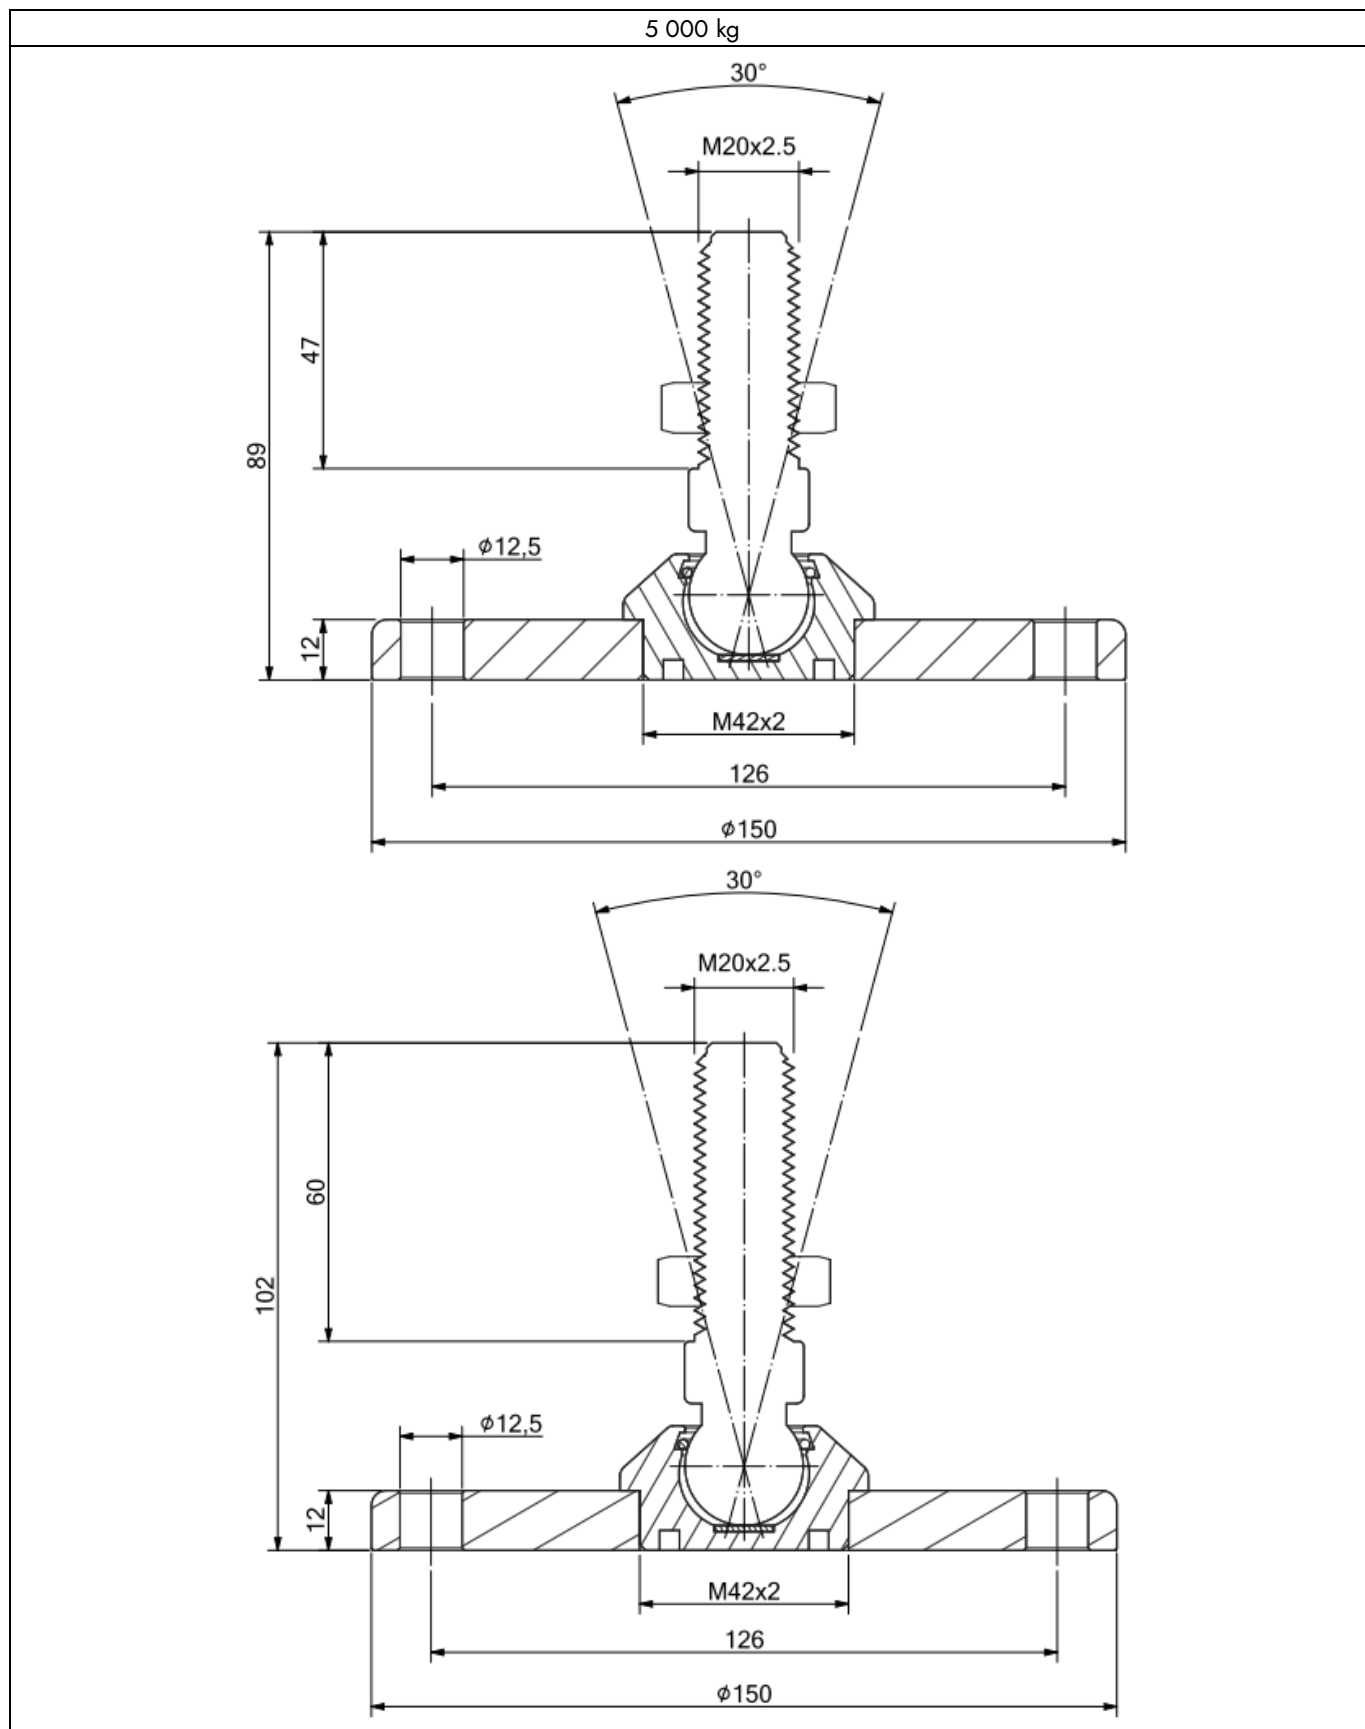

DIMENSIONS (mm)

