

SELF-CENTERING ADJUSTABLE HYGIENIC FEET

 **COMPRESSION**

- UP TO 20 000 KG APPLICATION RANGE
- STAINLESS STEEL
- 3-A CERTIFIED FOR HYGIENIC EQUIPMENT



MAX STATIC LOAD



kg	Thread	Dimensions	Material	Net weight (kg)
2 000	M12	Ø120 x H 101 mm	stainless steel	0.3
5 000	M16	Ø120 x H 101 mm	stainless steel	0.3
5 000	M20	Ø120 x H 101 mm	stainless steel	0.4
10 000	M24	Ø120 x H 97 mm	stainless steel	0.4
10 000	M30	Ø120 x H 97 mm	stainless steel	0.9
20 000	M36	Ø120 x H 97 mm	stainless steel	0.4

On request: pluggable hygienic foot, with holes for fixing to the floor.




APPLICATION

EXAMPLE OF APPLICATION

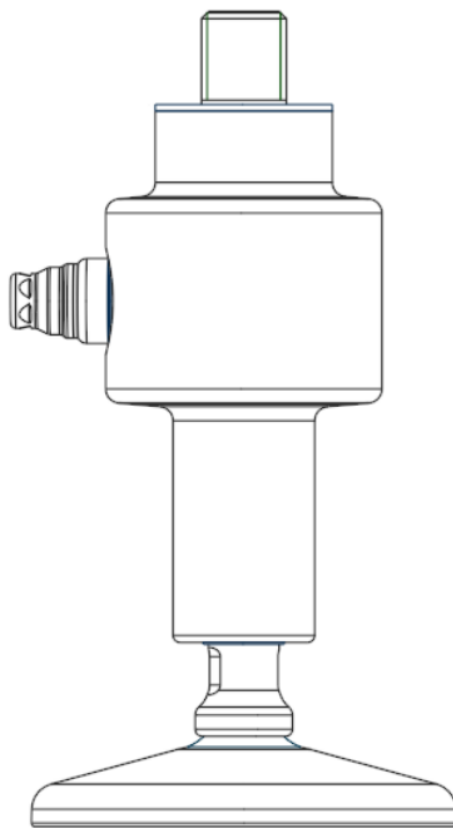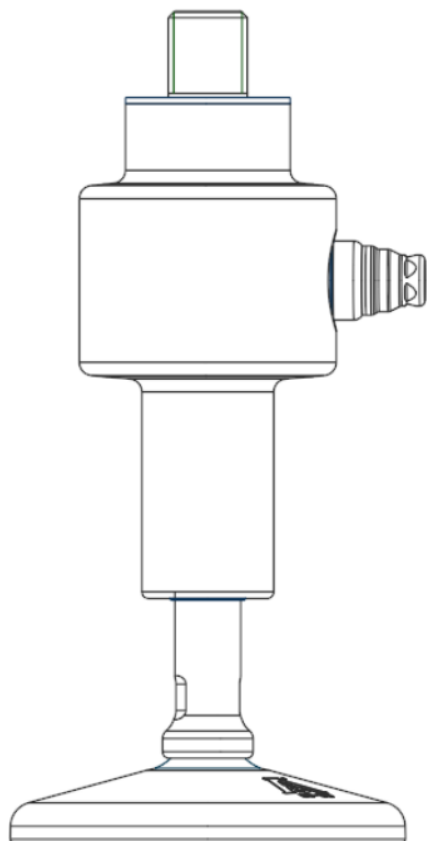


DIMENSIONS (mm)


2000 kg
M12 x 1.75

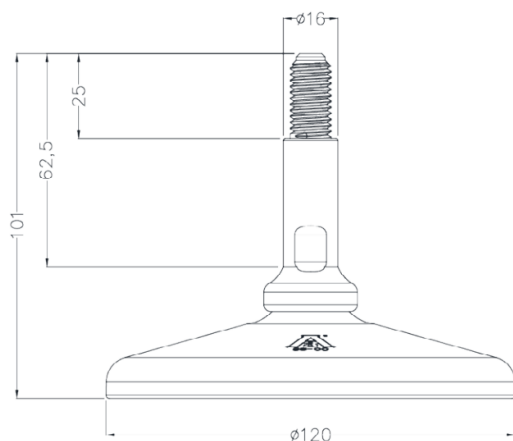


5000 kg
M16 x 2

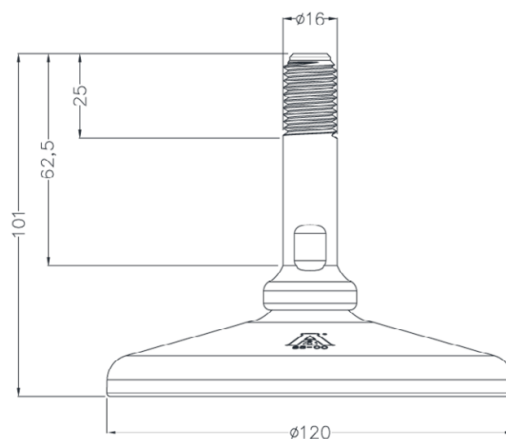


5000 kg
M20 x 2.5

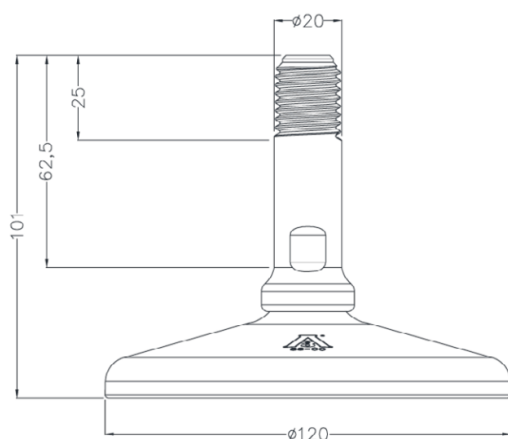


10000 kg
M24 x 3

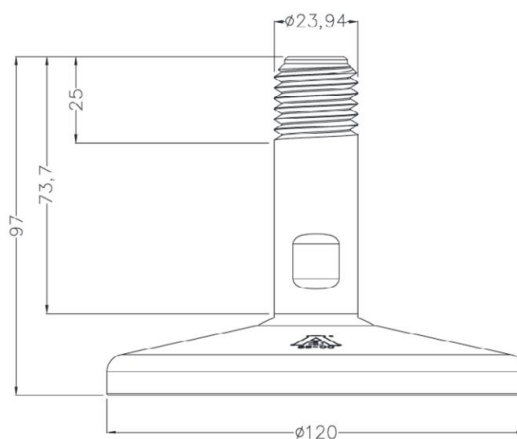

10000 kg
M30 x 3.5

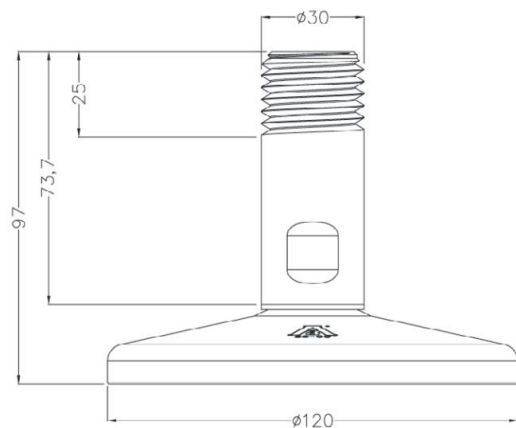

20000 kg
M36 x 4

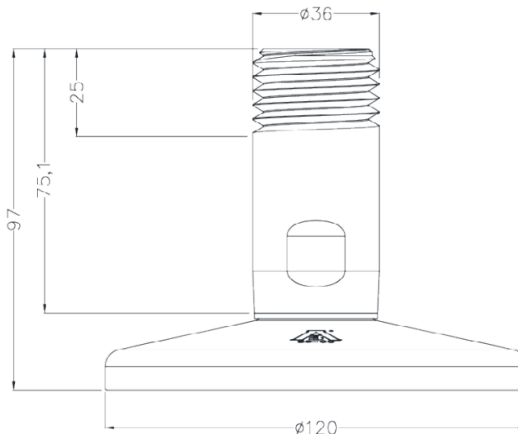

COMPLIANCE AND CERTIFICATION

Compliance	CE, RoHS, REACH	
Certifications		Equivalent of the CE marking for the United Kingdom
		American standard that regulates the design, production and use of hygienic equipment

