



PLATFORM WEIGHING LOAD CELL

TENSION &
COMPRESSION

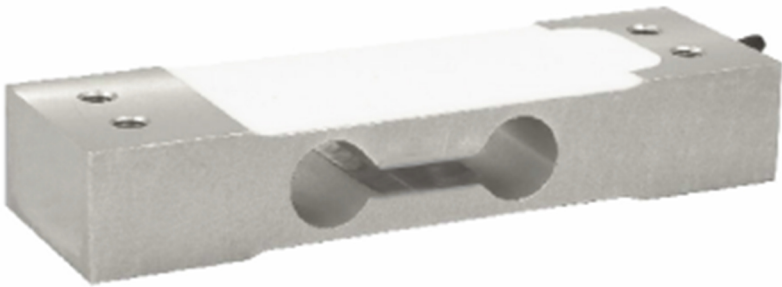

- LOW PROFILE
- COMBINED ERROR $\leq \pm 0.021\%$
- IP66 PROTECTION RATING
- ALUMINUM ALLOY



NOMINAL LOAD (FS)

kg	N	Net weight (kg)	Combined error	ISO 17025	High Temperature -40...250°C
35	350	0.25	$\leq \pm 0.021\%$	(optional)	(optional)
50	500	0.25	$\leq \pm 0.021\%$	(optional)	(optional)
75	750	0.25	$\leq \pm 0.021\%$	(optional)	(optional)
100	1 000	0.25	$\leq \pm 0.021\%$	(optional)	(optional)
150	1 500	0.25	$\leq \pm 0.021\%$	(optional)	(optional)
200	2 000	0.25	$\leq \pm 0.021\%$	(optional)	(optional)



TECHNICAL DATA

PRECISION

Rated Output (C_n)	2.0 mV/V $\pm 0,2$ % at FS
Zero Balance	$< \pm 2.0$ %
Combined error	$\leq \pm 0.021$ %FS
Non-linearity	$\leq \pm 0.015$ %FS
Hysteresis	$\leq \pm 0.015$ %FS
Repeatability	$\leq \pm 0.02$ %FS
Creep	$\leq \pm 0.02$ %FS (at 30 min FS)
Temperature coefficient of zero	0.0003 %FS/°C
Temperature coefficient of sensitivity	0.0003 %FS/°C
Compensated temperature range	-10...+40 °C
Operating temperature range	-20...+60 °C
Reference Temperature	23 °C

MECHANICAL PROPERTIES

Material	ALUMINUM ALLOY
Deflection at FN	~ 0.4 mm

ELECTRICAL PROPERTIES

Bridge configuration	Full Wheatstone bridge, 4-wire
Input resistance	$405 \pm 10 \Omega$
Output resistance	$350 \pm 3 \Omega$
Insulation resistance	$\geq 5\,000\, M\Omega$ at 100 V
Recommended excitation voltage	5 - 12 V
Cable diameter	4 mm
Cable length	500 mm


MECHANICAL LIMITS

Service load	120 %FS	Load without any permanent deformation or change in calibration.
Safe overload	150 %FS	The highest static load that may be applied once or briefly without mechanical damage.
Breaking load	> 300 %FS	Load at which permanent deformation or mechanical failure (fracture) occurs.
Max. transverse load (side)	50 %FS	Maximum lateral or shear load that can be applied (e.g. due to misalignment or friction).
Max. permissible dynamic load	70 %FS	For cyclic or oscillating loads, the amplitude should not exceed this load to prevent fatigue failure.


COMPLIANCE AND CERTIFICATION

Protection Rating	IP66 (IEC 60529)
Compliance	CE, RoHS, REACH
Calibration	Factory calibrated, ISO 17025 calibration available on request
HS-CODE	9031.80.80

DIMENSIONS

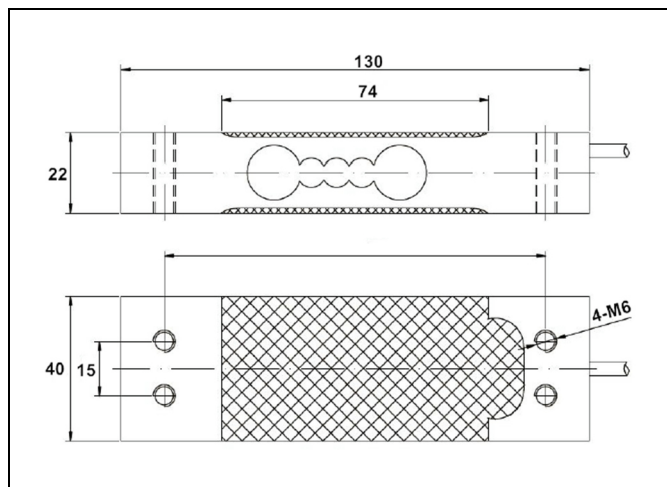

LOAD DIRECTION

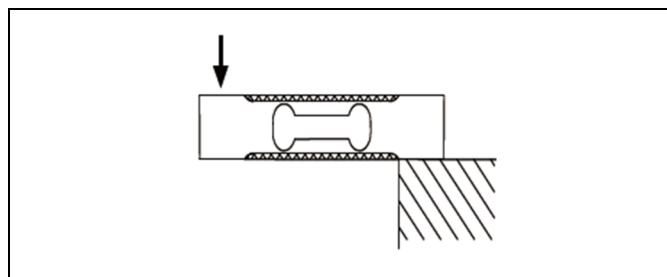

ELECTRICAL CONNECTION

