

COMPRESSION LOAD CELL – FOR FOOT



COMPRESSSION

- 17-4PH STAINLESS STEEL | 1.4542
- COMBINED ERROR $\leq \pm 0.07\%$
- IP67 PROTECTION RATING
- ADJUSTABLE HEIGHT



NOMINAL LOAD (FS)

kg	kN	NET WEIGHT (kg)	COMBINED ERROR	THREAD	UKCA	Ex	ISO 17025	Rated Output (mV/V)
75	0.75	1.7	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
150	1.5	1.7	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
300	3	1.7	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
500	5	1.7	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
1 000	10	1.4	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
2 000	20	1.7	$\leq \pm 0.07\%$	M12 x 1.75	•	•	•	2.0 $\pm 5\%$
5 000	50	1.8	$\leq \pm 0.07\%$	M20 x 2.5	•	•	•	2.0 $\pm 5\%$
10 000	100	1.7	$\leq \pm 0.07\%$	M24 x 3	•	•	•	2.0 $\pm 5\%$

ON REQUEST



TECHNICAL DATA

PRECISION

Rated Output (C_n)	2.0 mV/V $\pm$ 5 % at FS
Zero Balance	$\pm$ 1.0 %
Combined error	$\leq \pm$ 0.07 %FS
Non-linearity	$\leq \pm$ 0.049 %FS
Hysteresis	$\leq \pm$ 0.049 %FS
Creep	$\leq \pm$ 0.02 %FS (at 30 min FS)
Temperature coefficient on zero	0.002 %FS/ $^{\circ}$ C
Temperature coefficient on span	0.002 %FS/ $^{\circ}$ C
Compensated temperature range	-10...+50 $^{\circ}$ C
Operating temperature range	-20...+60 $^{\circ}$ C
Reference Temperature	23 $^{\circ}$ C

MECHANICAL PROPERTIES

Material	17-4PH STAINLESS STEEL 1.4542
Deflection at FN	$\sim$ 0.1 mm


MECHANICAL LIMITS

Service load	120 %FS	Load without any permanent deformation or change in calibration.
Safe overload	150 %FS	The highest static load that may be applied once or briefly without mechanical damage.
Breaking load	> 200 %FS	Load at which permanent deformation or mechanical failure (fracture) occurs.
Max. transverse load (side)	50 %FS	Maximum lateral or shear load that can be applied (e.g. due to misalignment or friction).
Max. permissible dynamic load	70 %FS	For cyclic or oscillating loads, the amplitude should not exceed this load to prevent fatigue failure.


ELECTRICAL PROPERTIES

Bridge configuration	Full Wheatstone bridge, 6-wire
Input resistance	350 $\pm$ 20 Ω
Output resistance	350 $\pm$ 5 Ω
Insulation resistance	$\geq$ 5 000 M Ω at 100 V
Recommended excitation voltage	5 - 20 V
Cable diameter	5.0 mm
Cable length	5 m: 75 – 5 000 kg 10 m: 10 000 kg

ELECTRICAL CONNECTION

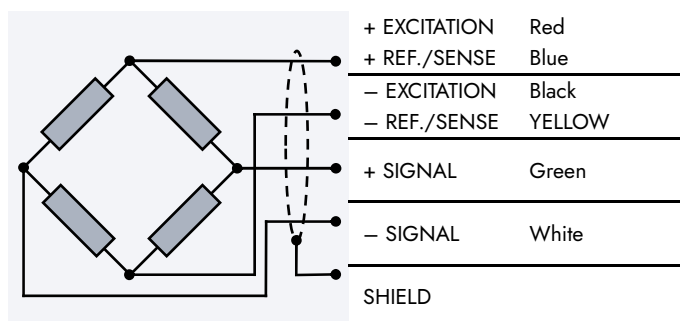

DIMENSIONS (mm)

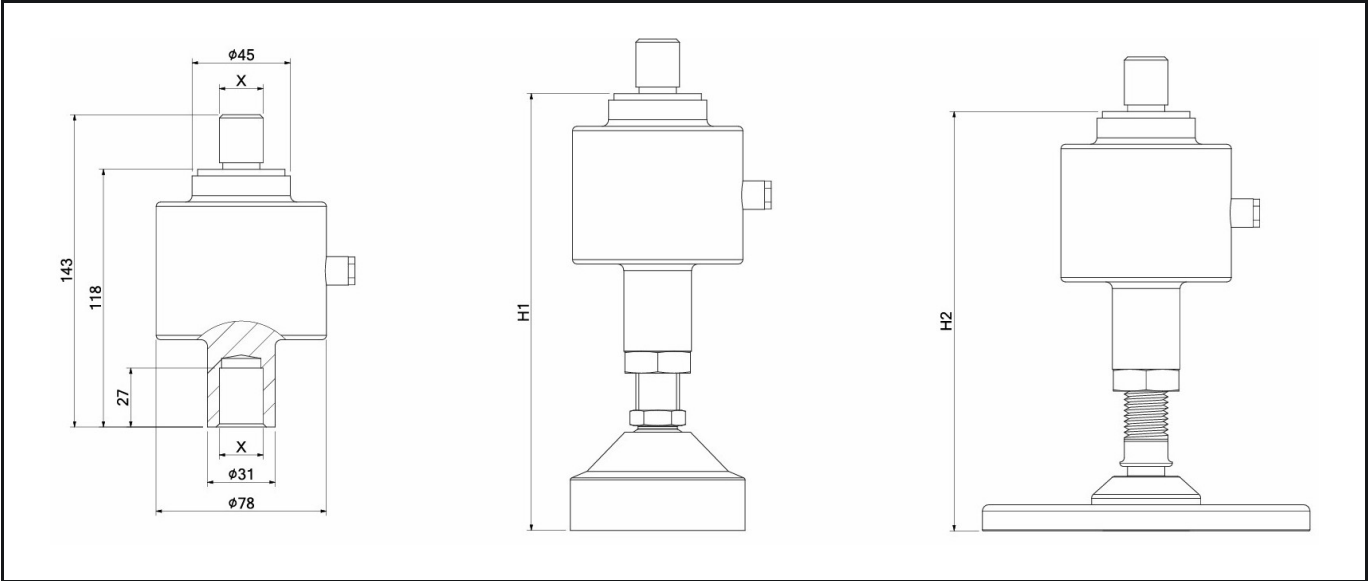

CAPAZITY	X	H1 (FLC +SB2)	H2 (FLC +STR)	INSTALLATION NOTES:
75 kg	M12 x 1.75	190 ÷ 200 mm	180 ÷ 192 mm	- screw the foot all the way in; - slightly unscrew the foot to adjust (maximum excursion: 10 mm); - tighten the fixing nut.
150 kg	M12 x 1.75			
300 kg	M12 x 1.75			
500 kg	M12 x 1.75			
1 000 kg	M12 x 1.75			
2 000 kg	M12 x 1.75			
5 000 kg	M20 x 2.5	-		
10 000 kg	M24 x 3			



COMPLIANCE AND CERTIFICATION

Protection Rating	IP67	
Compliance	CE, RoHS, REACH	
Calibration	Factory-calibrated, ISO 17025 calibration available on request	
HS-CODE	9031.80.80	
Certifications		Equivalent of the CE marking for the United Kingdom
Certifications on request		calibration report
		LAT Accredia calibration certificate ISO 376 or ASTM E74 for <u>capacities from 1000 kg to 10000 kg</u>
		ATEX (zone 2-22)



EXAMPLE OF INSTALLATION
WITH STR AND SB2 SERIES FEET



COMPLEMENTARY ACCESSORIES

	DESCRIPTION	CODE
	AISI 304 stainless steel plate for constraints against lateral forces and anti-tilt. Only for SB2 series feet.	M12 PPV M20 PPV80

