


MOUNTING KIT FOR SINGLE-POINT LOAD CELLS



- GALVANIZED STEEL
- UP TO 300 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT

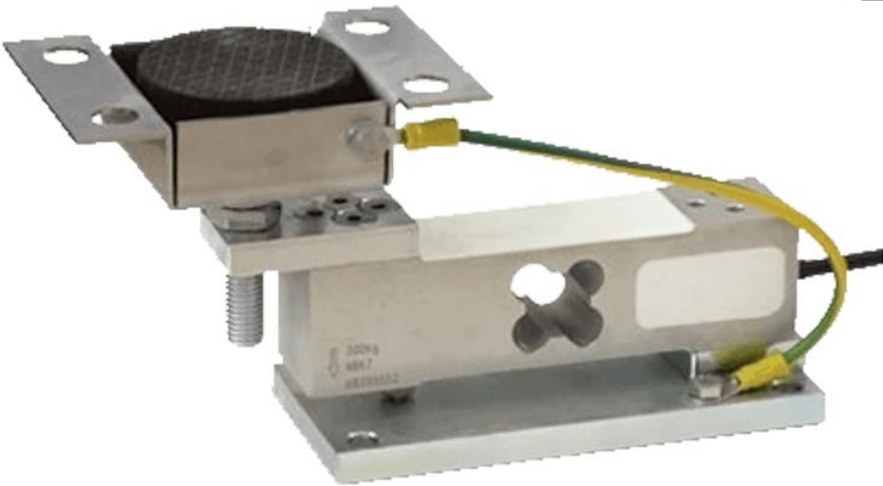

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
200	2 000	1.7	LCLG (max. 50 kg) - LCLF - LCLH
300	3 000	1.7	LCLC


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION


- Adjustable upper plate in galvanized steel.
- Lower plate and block in galvanized steel.
- Constraint against lateral forces and anti-tilt by galvanized steel self-centering joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.
- Can be used for systems with at least 3 supports.

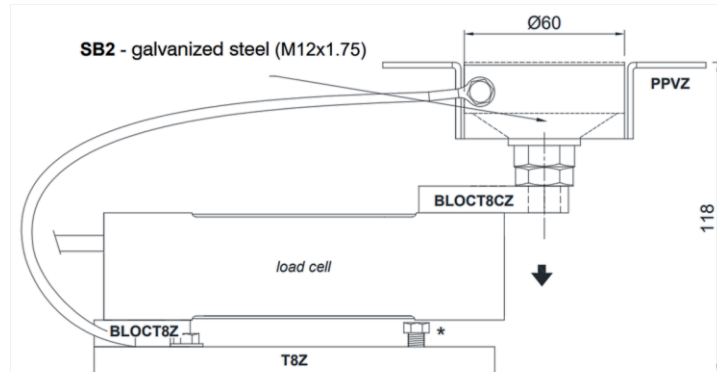

200...300 kg
2...3 kN


MOUNTING NOTES

- During transport and installation (*) the lock must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of a structure with four-point support, if one point does not touch the support base of the foot, adjust the foot height.
- For the load cell fixing screws (*), provide a tightening torque of 7.5 Nm.

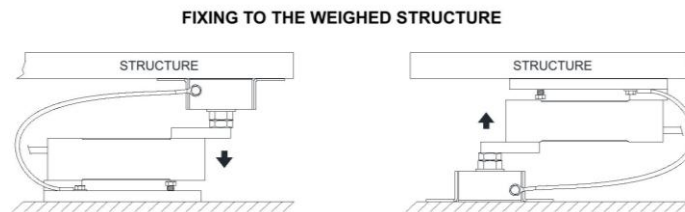

Tightening
torque:
7.5 Nm

POSSIBLE UPPER PLATE POSITIONS

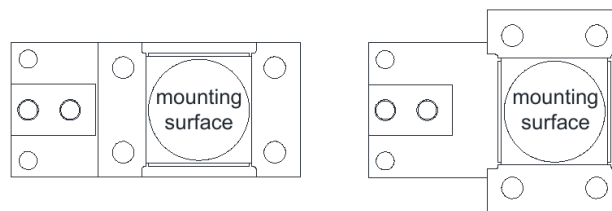

DIMENSIONS (mm)

