

MOUNTING KIT FOR BENDING BEAM LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 500 KG APPLICATION RANGE



MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
500	5 000	1.5	LBLB - LBLI


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION


- Aluminum alloy tension ball joint.
- AISI 304 stainless steel lower plate.
- Locking screw to avoid damage during transport and installation.

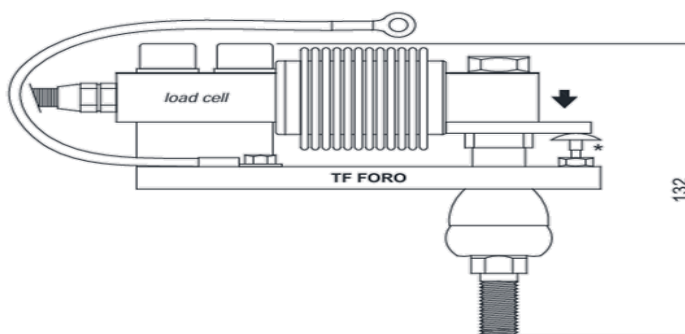

500 kg
5 kN

MOUNTING NOTES

- During transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Connect the structure to be weighed by means of copper wire, then connect all the lower plates to the earthing system.
- For the load cell fixing screws (·), provide a tightening torque of 79 Nm.

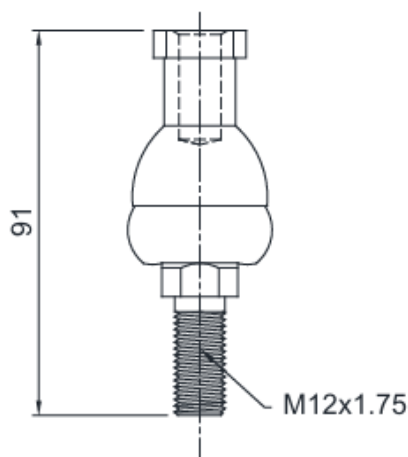

Tightening
torque:
79 Nm



DIMENSIONS (mm)

