


MOUNTING KIT FOR BENDING BEAM LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 1 500 KG APPLICATION RANGE

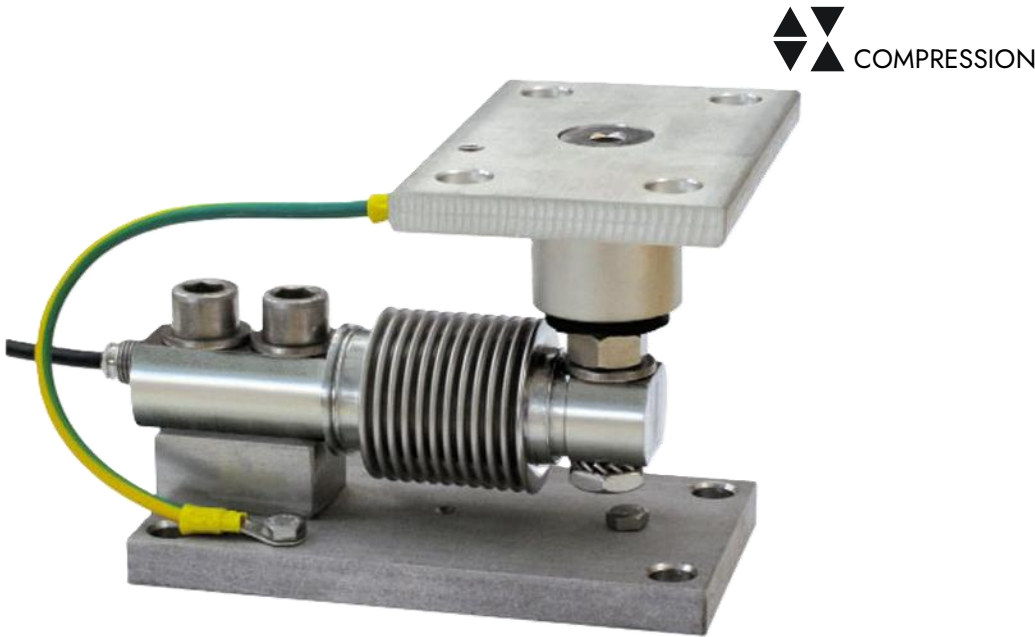

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
500	5 000	2.3	LBLB - LBLI
1 500	15 000	2.3	LBLB - LBLI


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION


- Upper plate with a compression joint in AISI 304 stainless steel and rubber.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Locking screw to avoid damage during transport and installation.
- Can be used for systems with at least 3 supports.

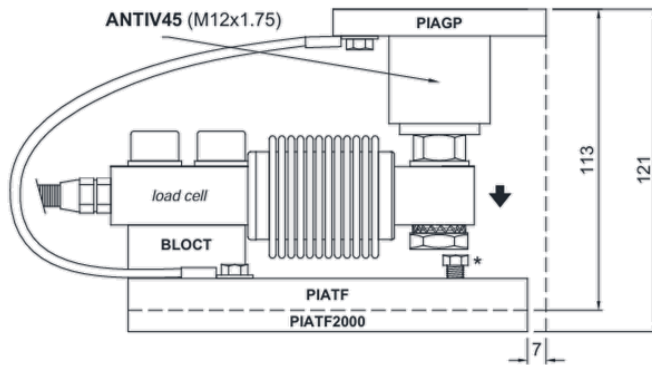


500 ... 1 500 kg
5 ... 15 kN

MOUNTING NOTES


- During transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.
- For the load cell fixing screws (:), provide a tightening torque of 50 Nm.

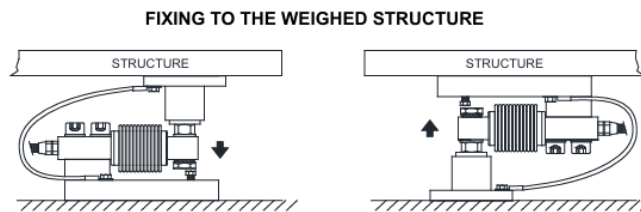

POSSIBLE UPPER PLATE POSITIONS

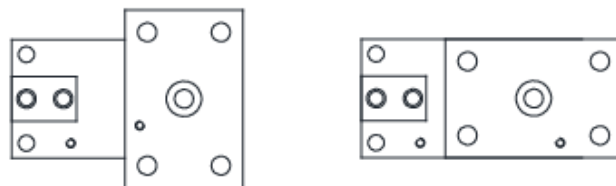


ANTIV45

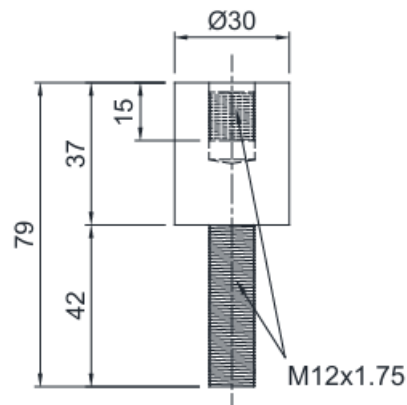

Tightening
torque:
50 Nm



DIMENSIONS (mm)

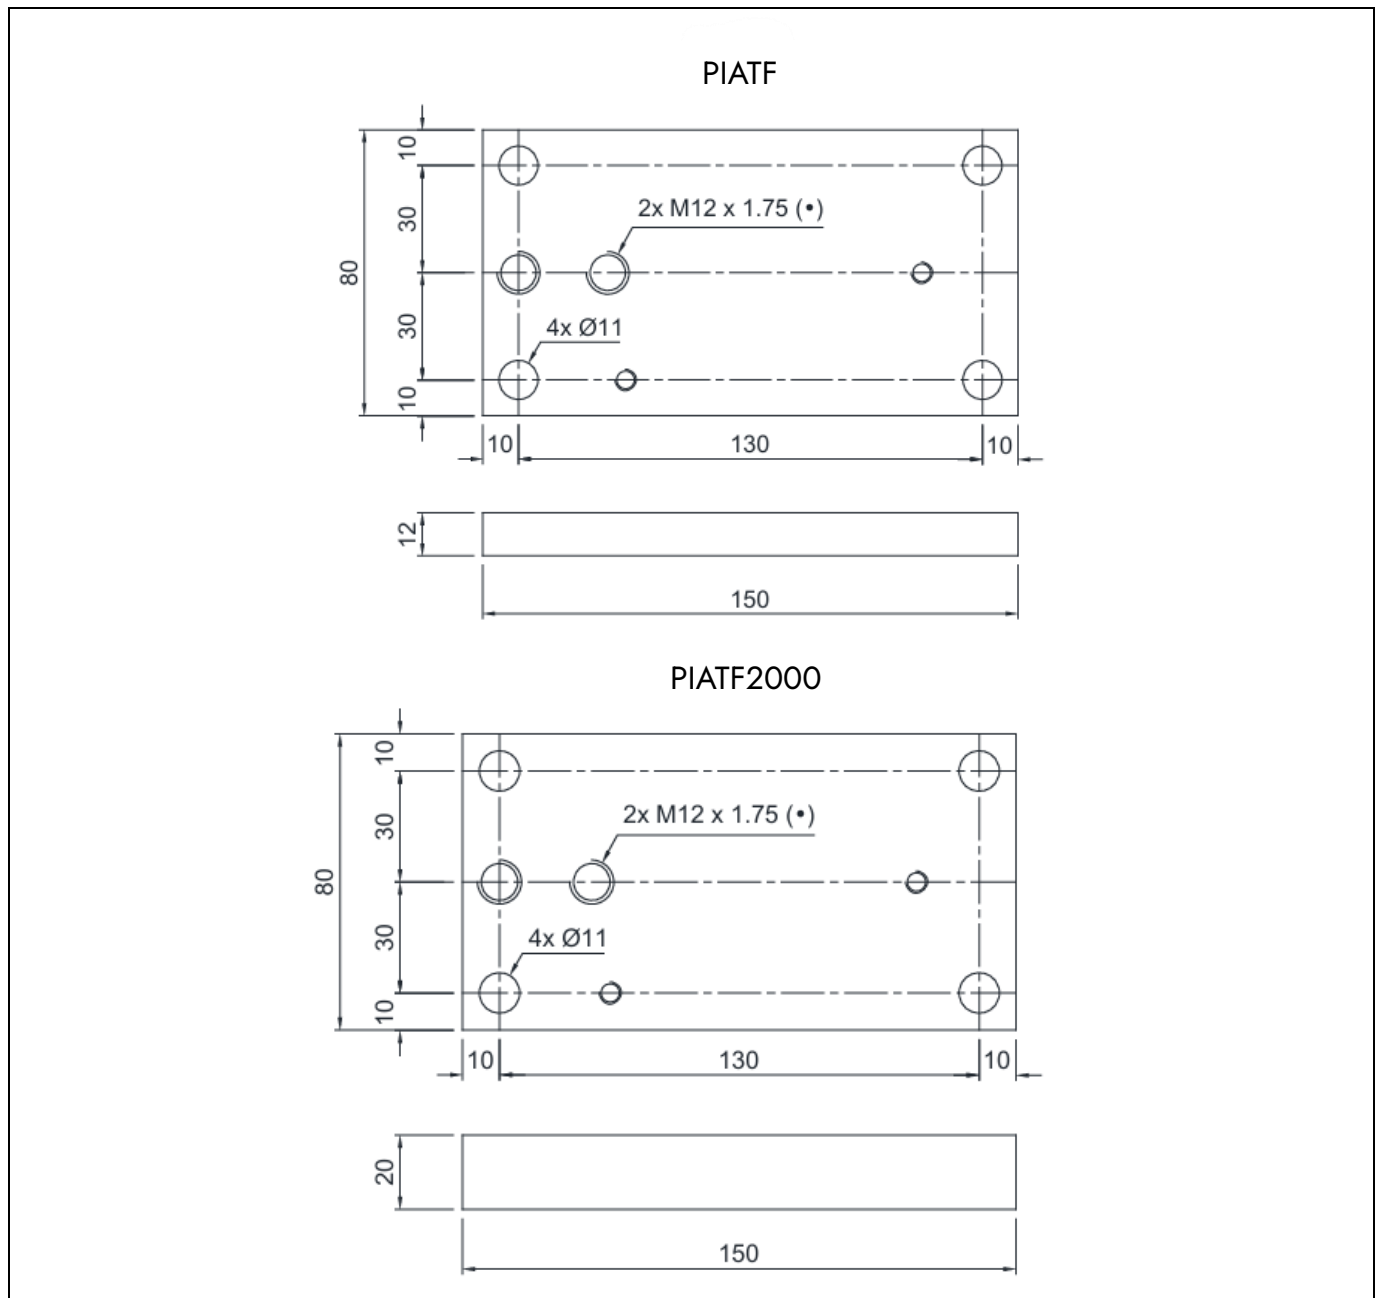

DIMENSIONS (mm)

