


MOUNTING KIT FOR BENDING BEAM LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 300 KG APPLICATION RANGE

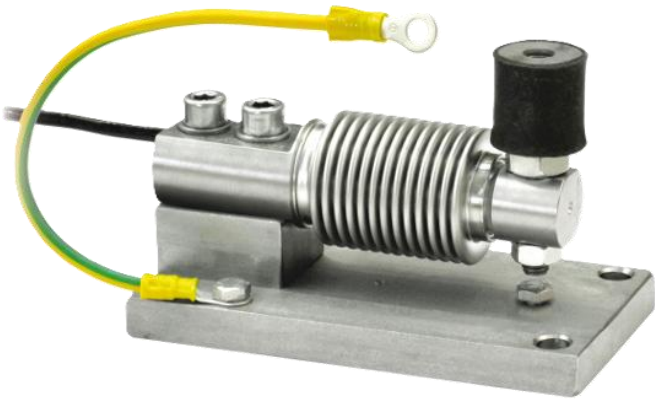

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
300	3 000	1.2	LBLD


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION

- Compression joint in AISI 304 stainless steel and rubber.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Locking screw to avoid damage during transport and installation.
- Can be used for systems with at least 3 supports.

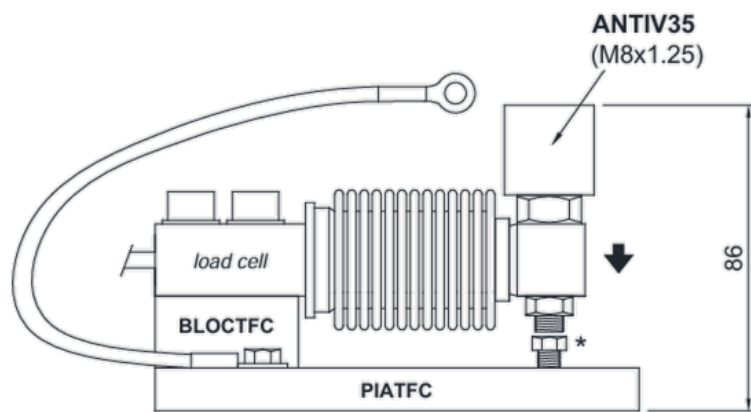


300 kg
3 kN


MOUNTING NOTES

- During transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Connect the structure to be weighed by means of copper wire, then connect all the lower plates to the earthing system.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.
- For the load cell fixing screws (*), provide a tightening torque of 19 Nm.

FIXING TO THE WEIGHED STRUCTURE

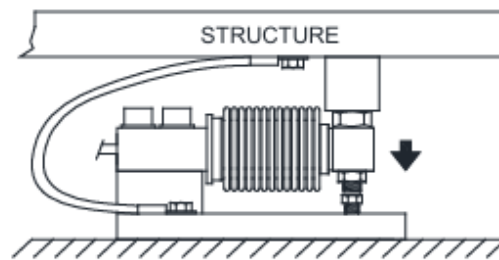

ANTIV35
(M8x1.25)

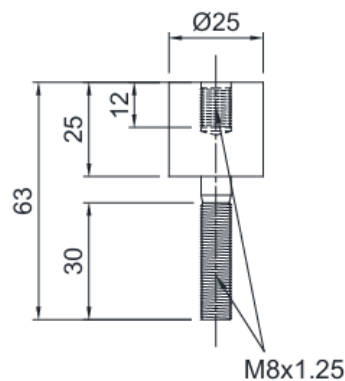


Tightening
torque:
19 Nm



DIMENSIONS (mm)

PIATFC

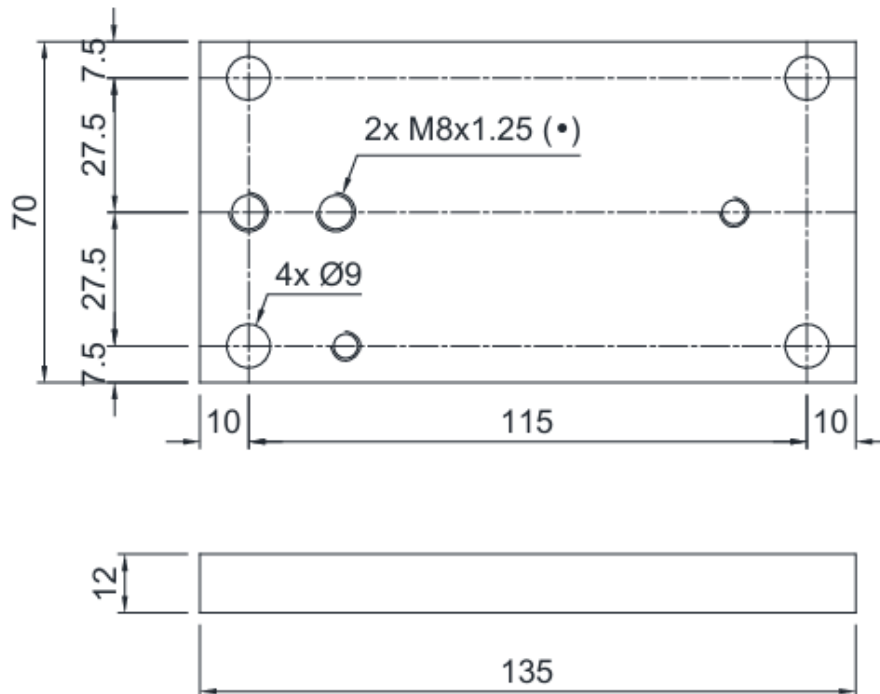

BLOCTFC

