


MOUNTING KIT FOR COMPRESSION - LOW PROFILE
LOAD CELLS



- HOT GALVANIZED STEEL
- UP TO 5 000 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT

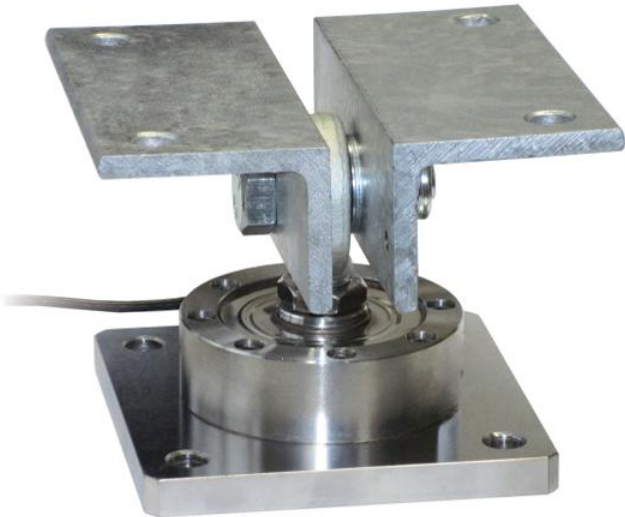

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
2 000	20 000	3.6	LKLE (1 000 - 2 000 kg)
5 000	50 000	3.6	LKLE (5 000 kg)


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION

- Adjustable upper plate in hot galvanized steel.
- Constraint against lateral forces and anti-tilt by ball-and-socket joint.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- * Warning!
- Max dimension to insert the bolt to allow the cell to perform properly

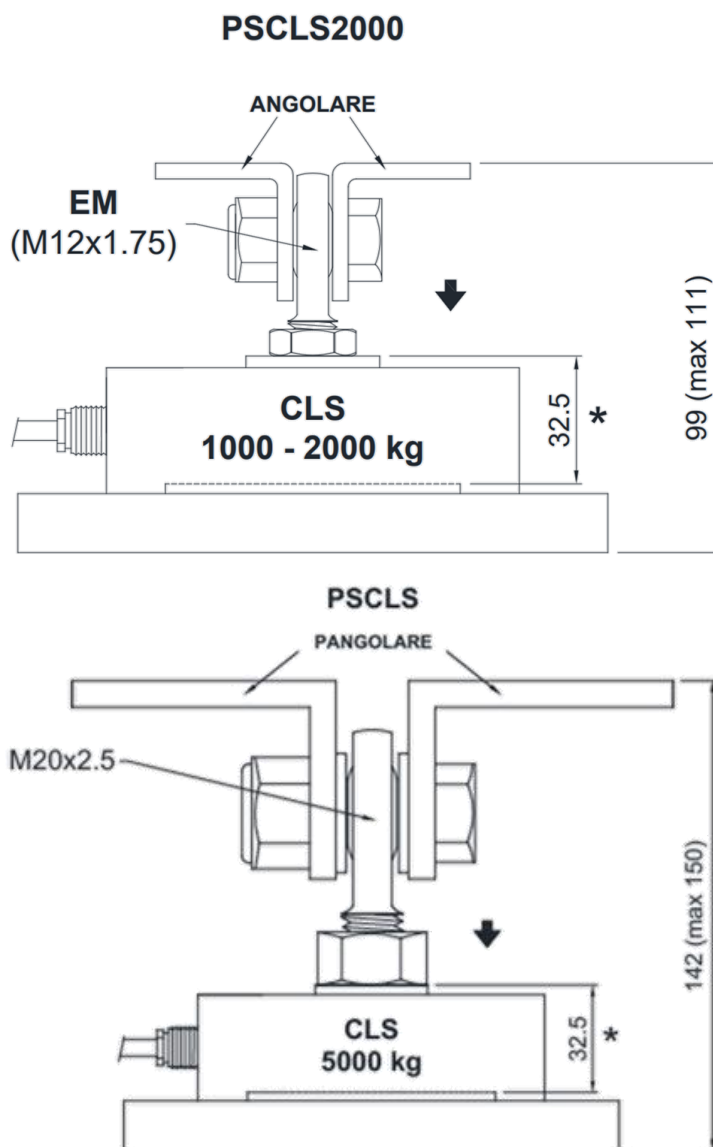


5 000 kg
50 kN



MOUNTING NOTES

- Finished the installation by means of a copper wire, connect the upper supporting plate with the lower supporting plate, then connect all the lower plates to the earthing system.

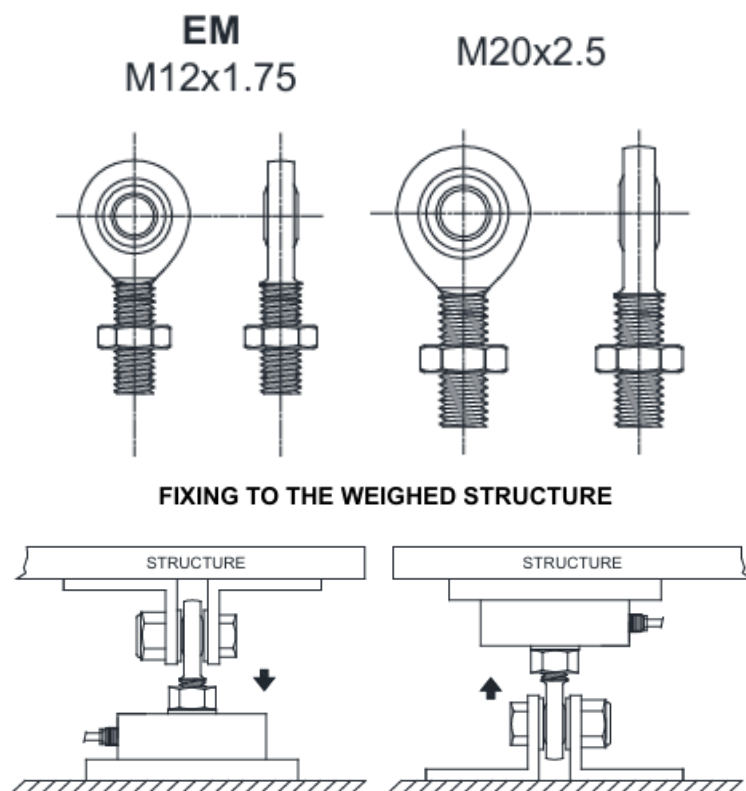

DIMENSIONS (mm)

