

MOUNTING KIT FOR COMPRESSION - LOW PROFILE
LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 5 000 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT



MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
5 000	50 000	1.5	LKLE


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION

- Adjustable upper plate in AISI 304 stainless steel (PPV80).
- Constraint against lateral forces and anti-tilt by stainless steel self-centering joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.

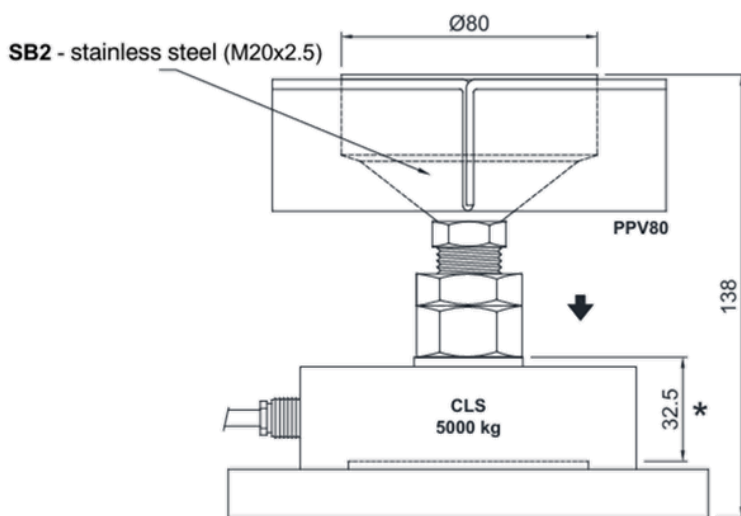


5 000 kg
50 kN




MOUNTING NOTES

- Finished the installation by means of a copper wire, connect the upper supporting plate with the lower supporting plate, then connect all the lower plates to the earthing system.
- In case of structure with four-point support, if one-point does not touch the support base of the foot, you must proceed to adjust foot height.


FIXING TO THE WEIGHED STRUCTURE

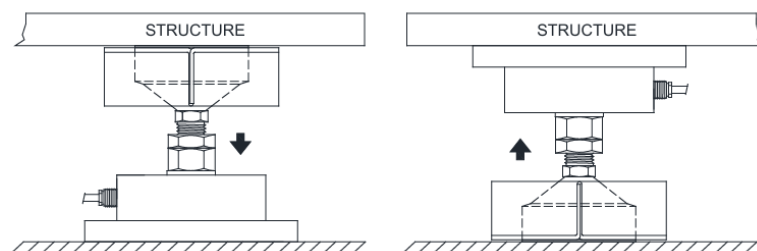

POSSIBLE UPPER PLATE POSITIONS

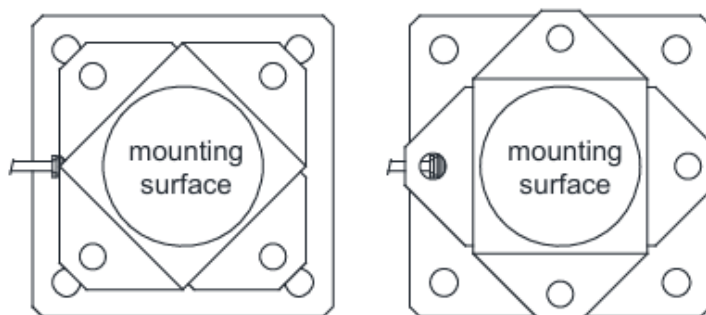

SB2 - stainless steel
(M20x2.5)

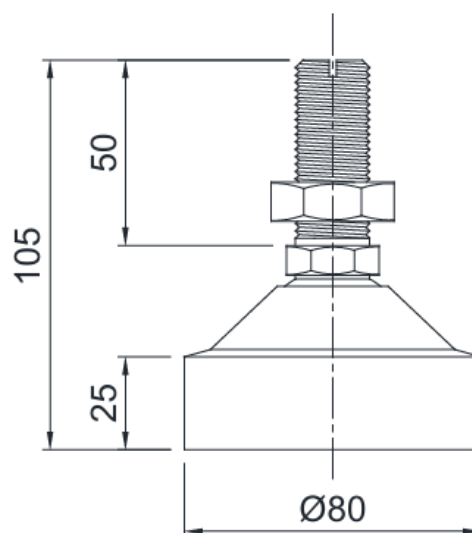

CLS
5000 kg

4x Ø14

M20x2.5

1/4 gas

17.5 115 150 17.5 115 150

105 90 34 16 32.5 * 3 35 15 M6x1 7

* Warning!
Max dimension to insert the bolt to allow the cell to perform properly

DIMENSIONS (mm)

