


MOUNTING KIT FOR SHEAR BEAM LOAD CELLS



- AISI 304 STAINLESS STEEL
- UP TO 2 000 KG APPLICATION RANGE
- ADJUSTABLE HEIGHT

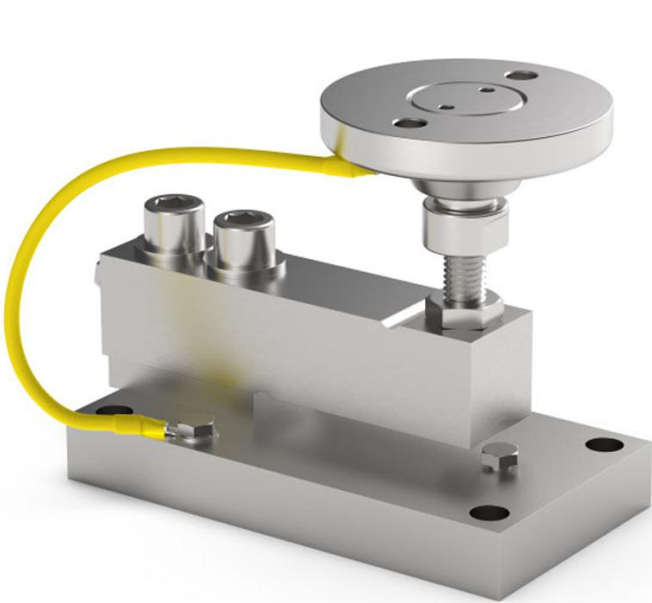

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
2 000	20 000	2.7	LBLF - LBLL - LBLA - LBLK - LBLJ


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION

- Constraint against lateral forces and anti-tilt by AISI 304 stainless steel self-centering joint foot.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.

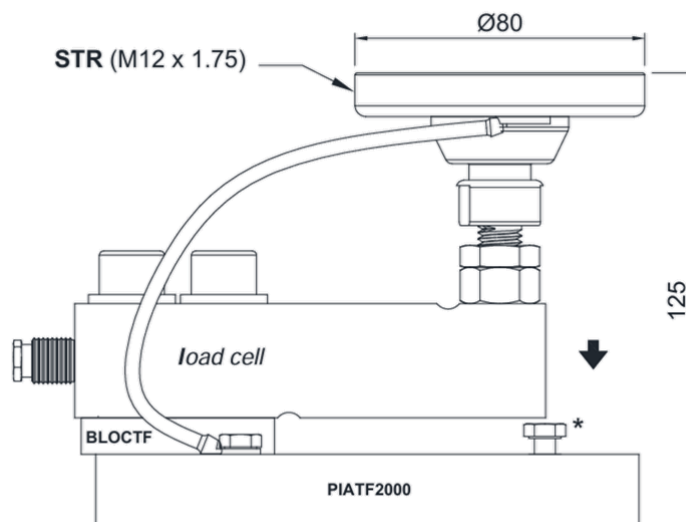


2 000 kg
20 kN

MOUNTING NOTES

- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.

FIXING TO THE WEIGHED STRUCTURE

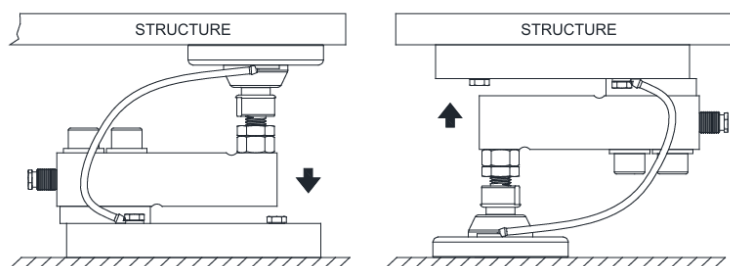

DIMENSIONS (mm)

