


MOUNTING KIT FOR SHEAR BEAM LOAD CELLS

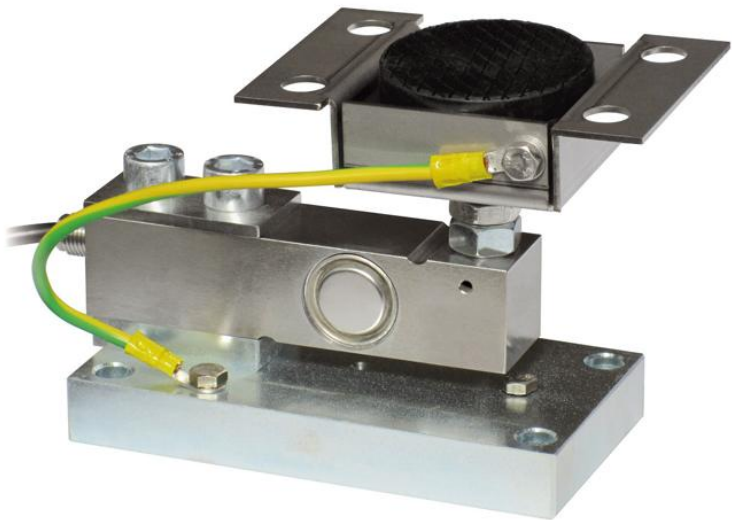

- SEE DESCRIPTION
- UP TO 2 000 KG APPLICATION RANGE

MAX STATIC LOAD

kg	N	Net weight (kg)	For load cells
2 000	20 000	2.7	LBLF - LBLA


Load cell not included



DESCRIPTION AND MOUNTING

DESCRIPTION


- See manufacturer documentation.

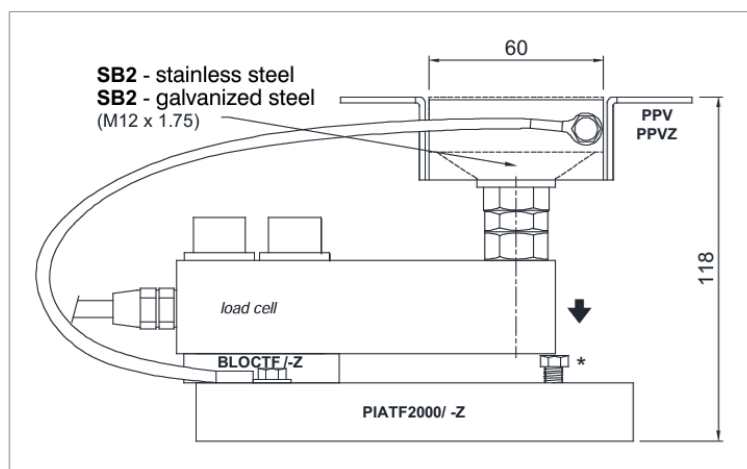

2 000 kg
20 kN

MOUNTING NOTES

- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.
- For the load cell fixing screws (·), provide a tightening torque of 50 Nm for PV and 79 Nm for PVZ.

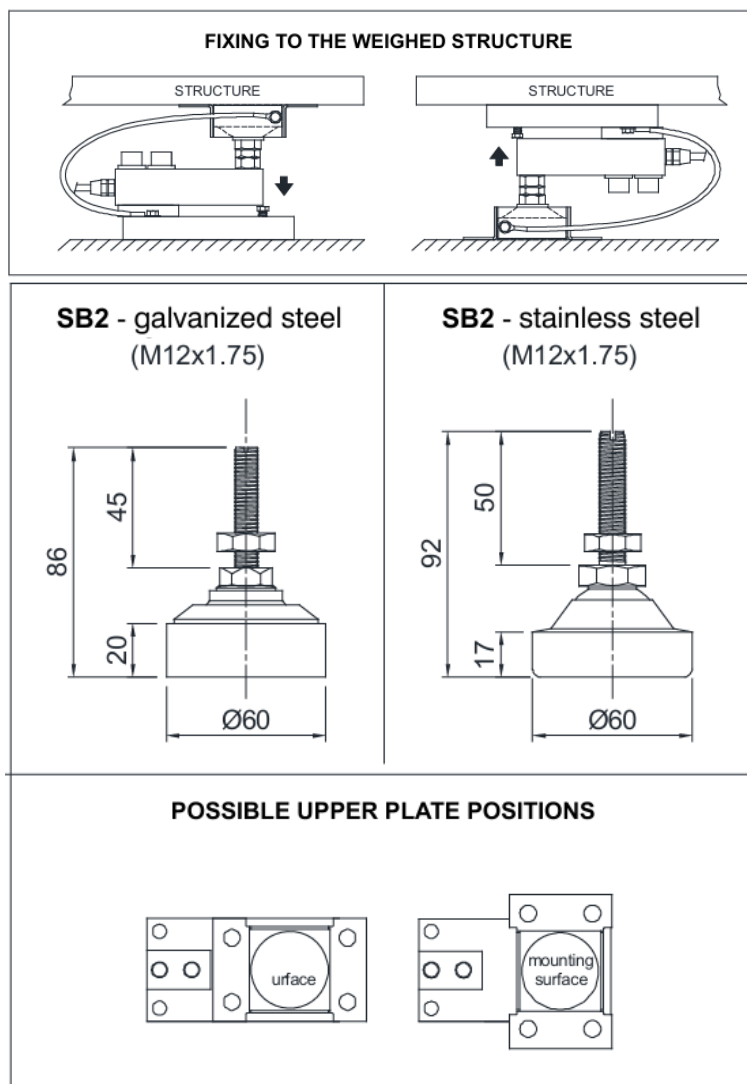

Tightening
torque
50 / 79
Nm



DIMENSIONS (mm)

