



MOUNTING KIT FOR SHEAR BEAM LOAD CELLS

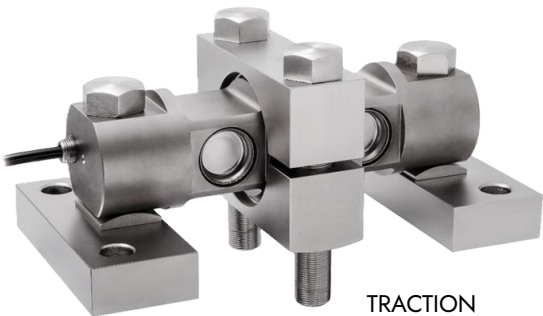

TRACTION

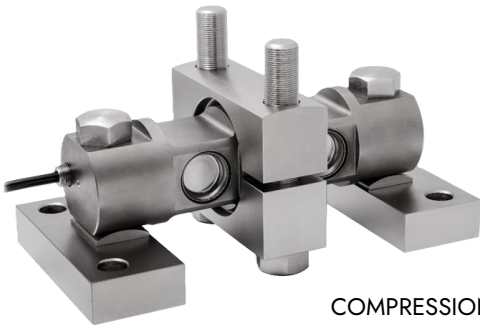

COMPRESSION

- SEE DESCRIPTION
- UP TO 60 KLB/27 TON APPLICATION RANGE



MAX STATIC LOAD

kg	kN	Net weight (kg)	For load cells
27 000	270	16.9	LDLA (13.6 t ÷ 27 t)

Load cell not included



DESCRIPTION, TECHNICAL SPECIFICATIONS AND EXAMPLE OF APPLICATION


DESCRIPTION

- Nickel-plated steel alloy mounting kit for rigid attachment of the load cell.
- It prevents horizontal movement.

TECHNICAL SPECIFICATIONS

The base plates must be placed on non-deformable surface. To ensure the stability of the structure, the system designer must predict any further precaution against side shifts and anti-tilt in function of: knocks and vibrations, wind effect, seismic conditions and hardness of support structure.

EXAMPLE OF APPLICATION

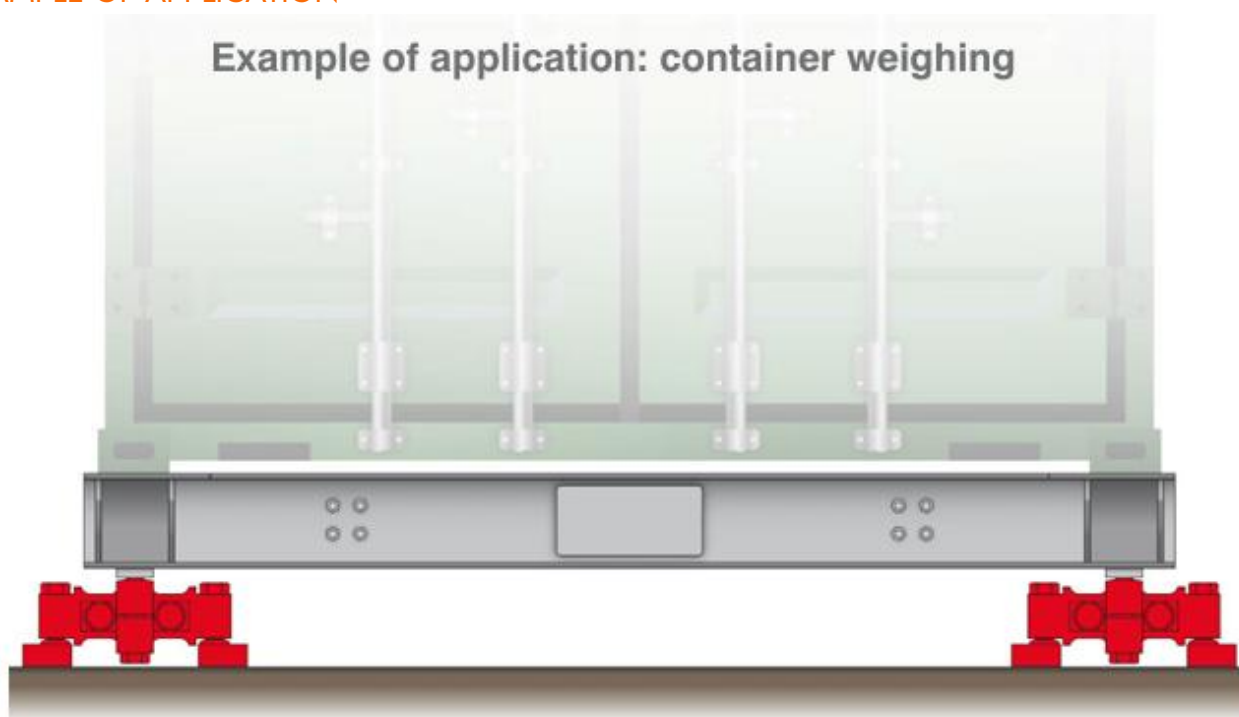

DIMENSIONS (mm)

